

Retaining Pins:

Ideal fastener solution when components are to be quickly assembled or disassembled

Single / Double Coil R-Clips


Technifast stock a large range of Retaining Pins (R-Clips) in wire diameters from 1.2mm through to 8mm to meet the requirements of a large range of applications.

Choose from a single coil - or for more durability a double coil R-Clip to spread the stresses out more evenly for a longer life cycle.

Retaining clips are also known as spring cotters and are often used in conjunction with clevis pins when inserted through the shaft, to keep the pin in place.

R-Clips are particularly useful when components are to be quickly assembled or disassembled and are used in a variety of industries including automotive and agriculture.

Nominal Diameter	Diameter 'd'	Diameter 'H' (Ref Only)	Overall Length 'L'	Hole Diameter	Range of Shaft Dia.	Material	
Single Coil	1.2mm	2.0mm	22mm	1.5mm	5-8mm	Steel	
	1.6mm	2.0mm	25mm	2.0mm	6-10mm		
	1.8mm	2.5mm	36mm	2.2mm	8-13mm		
	2.0mm	5.0mm	48mm	2.5mm	15-25mm		
	2.0mm	3.0mm	56mm	2.5mm	9-14mm	Steel / Stainless	
	2.5mm	4.0mm	48mm	3.0mm	9-14mm		
	2.5mm	5.5mm	72mm	3.0mm	16-27mm	Steel	
	3.0mm	4.5mm	72mm	3.5mm	10-20mm	Steel / Stainless	
	4.0mm	6.5mm	76mm	4.5mm	16-25mm		
	4.5mm	7.0mm	90mm	5.0mm	20-30mm		
	5.0mm	7.0mm	102mm	5.5mm	20-35mm		
	Double Coil	6.0mm	8.0mm	124mm	7.0mm	28-40mm	Steel
		7.0mm	10.0mm	124mm	8.0mm	28-45mm	
8.0mm		11.0mm	128mm	9.0mm	30-45mm		
2.0mm		4.0mm	56mm	2.5mm	8-14mm	Steel	
3.0mm		5.0mm	72mm	3.5mm	14-20mm		
4.0mm		6.0mm	92mm	4.5mm	17-24mm		
5.0mm		6.0mm	108mm	5.5mm	18-30mm		
6.0mm		8.0mm	138mm	6.5mm	24-36mm		
7.0mm	9.0mm	148mm	8.0mm	26-40mm			
8.0mm	8.0mm	149mm	9.0mm	24-40mm			

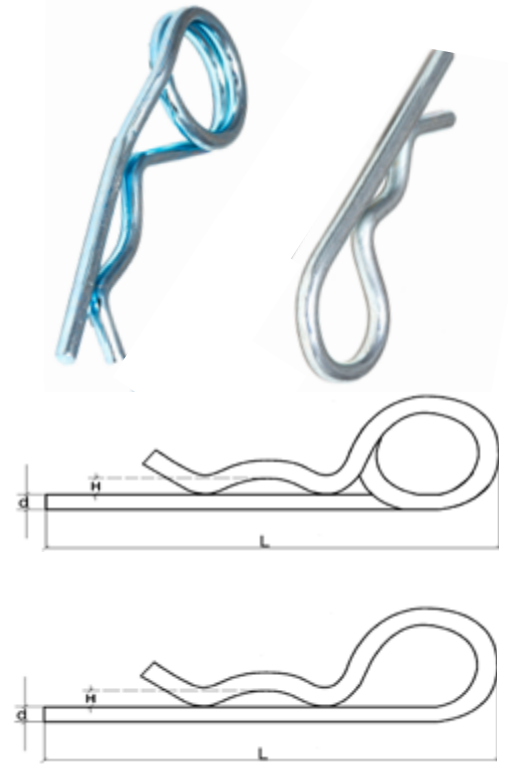

Materials:

- Zinc Plated Spring Steel
- Stainless Steel A2
- Stainless Steel A4

[View Retaining Pin Range](#)

[Request A Quote](#)

[Visit Our Website](#)

[Join Our Community](#)

TECHNIFAST

North Folds Road
Oakley Hay Industrial Estate
Corby, Northants, NN18 9AT

+44 (0) 1536 461140
sales@technifast.co.uk
www.technifast.co.uk

